HORIZONTAL TURNTABLES

BODE POSITIONERS

BODE SERVICE

BODE HIRE

TT 300 with extension arms / TT 300 mit Verlängerungsarmen

General description:

Positioners of the TT-range are used for welding, grinding and positioning purposes. Infinitely variable turning speed, achieved by an inverter controlled motorgearbox allows ideal possibilities for welding and positioning. Large bearings ensure stability and smooth movement.

Beschreibung:

Schweissdrehtische der TT-Baureihe werden zum Schweissen, Schleifen und Positionieren eingesetzt. Die stufenlos einstellbare Drehgeschwindigkeit, die über einen frequenzumrichtergesteuerten Getriebemotor realisiert wird, erlaubt eine optimale Werkstückpositionierung.
Großzügig dimensionierte Kugeldrehverbindungen sorgen für Stabilität, hohe Tragkraft und gleichmäßige Bewegung.

Technical Data:

Turning drive: Geared AC-motor, controlled by an inverter is driving the face plate over pinion and slewing ring.
Electrics: 230 V, 1 Phase, 50 Hz or 400 V, 3 Phase, 50 Hz

Technische Daten:

Drehantrieb: Frequenzumrichtergeregelter Drehstromantrieb treibt die Planscheibe über eine Kugeldrehverbindung
Elektrischer Anschluss: 230 V, 1 Phase, 50 Hz. oder 400 V, 3 Phasen, 50 Hz

- We reserve the right to alter specifications without prior notice -
- Technische und Konstruktive Änderungen vorbehalten -

BODE
POSITIONERS
BODE
SERVICE
BODE
HIRE

Turntable Type TT800 (40ton load)
Horizontaldrehtisch Type TT800 (40to Tragkraft)

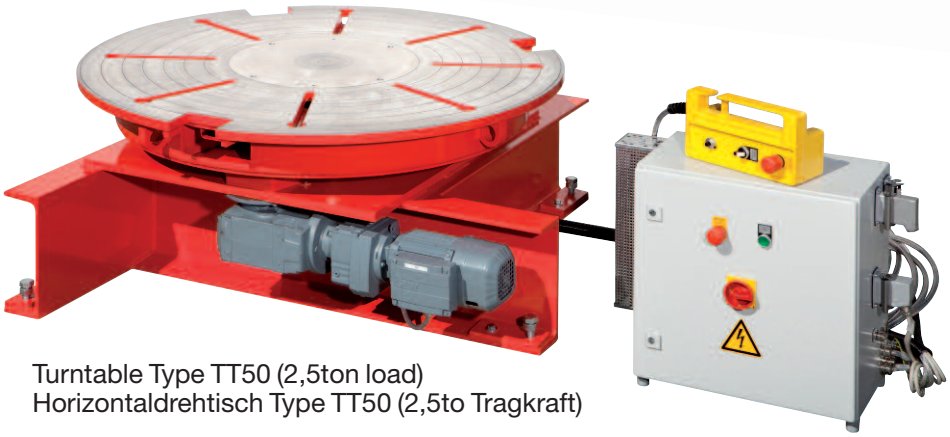

Turntable Type TT50 (2,5ton load)
Horizontaldrehtisch Type TT50 (2,5to Tragkraft)

Model Typ	Load Capacity Tragkraft (kg)	Table Diameter Planscheiben-durchmesser (mm)	Rotation Speed (rpm) Drehzahl (U/min)	Earthing Stromübertragung (Amps)
TT 2	100	400	0,18-3,60	300
TT 5	250	610	0,15-3,00	300
TT 10	500	610	0,15-3,00	300
TT 20	1000	920	0,07-1,40	300
TT 40	2000	1220	0,05-1,00	300
TT 60	3000	1220	0,05-1,00	300
TT 80	4000	1220	0,05-1,00	300
TT 100	5000	1830	0,05-1,00	300
TT 200	10000	1830	0,05-1,00	600
TT 300	15000	2300	0,05-1,00	600
TT 400	20000	2300	0,05-1,00	600
TT 500	25000	2300	0,05-1,00	600
TT 600	30000	2940	0,05-1,00	600
TT 700	35000	2940	0,05-1,00	600
TT 800	40000	2940	0,05-1,00	600
TT 1000	50000	2940	0,05-1,00	600

Other than specified sizes available on request
Sonderanfertigungen auf Anfrage

F. Bode & Sons Limited
Unit No 1 Stubbins Lane
Claughton-On-Brock
Preston, Lancs
England
PR3 0QH

Tel.: +44 (0) 1995 643 210
Fax: +44 (0) 1995 643 211

Visit our web site - www.bode.co.uk
E-mail - sales@bode.co.uk