


**Kistler Maschinen-
und Anlagenbau GmbH**
Mackstrasse 84
D-88348 Bad Saulgau, Germany
Tel +49 (0) 75 81 4 88 82-0
Fax +49 (0) 75 81 4 88 82-22
info@kistler-machine.de
www.kistler-machine.de

DESCRIPTION

Positioners of the HP-range are used for welding, grinding and positioning purposes. Apart from the turning drive of the faceplate, this range of positioners provides hydraulic tilting of the faceplate and hydraulic lifting.

Infinitely variable workpiece positioning ensures ideal ergonomic and economic working positions.

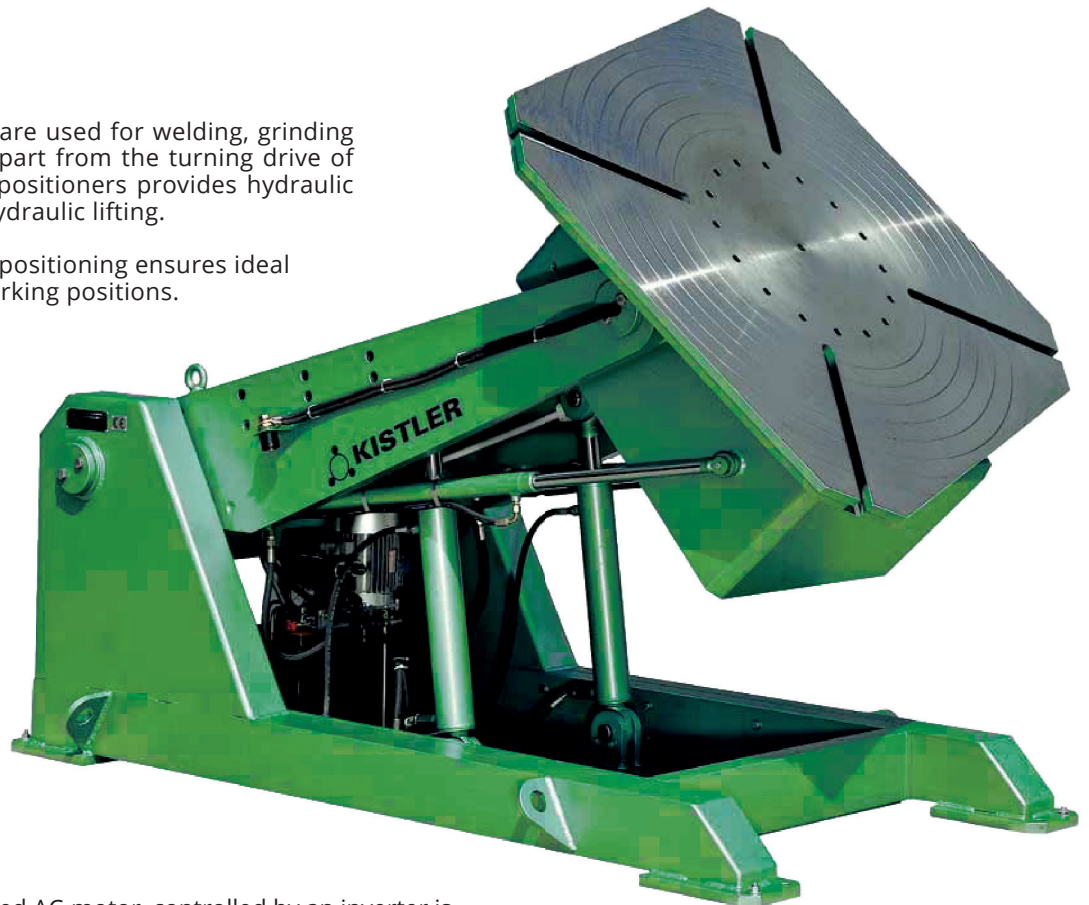

TECHNICAL DATA:

Turning drive: Geared AC-motor, controlled by an inverter is driving the face plate over a ball bearing


Tilting movement: hydraulic

Height adjustment: hydraulic

Electrics: 400V, 3PH., 50 Hz

- We reserve the right to alter specifications without prior notice -

**Kistler Maschinen-
und Anlagenbau GmbH**
Mackstrasse 84
D-88348 Bad Saulgau, Germany
Tel +49 (0) 75 81 4 88 82-0
Fax +49 (0) 75 81 4 88 82-22
info@kistler-machine.de
www.kistler-machine.de

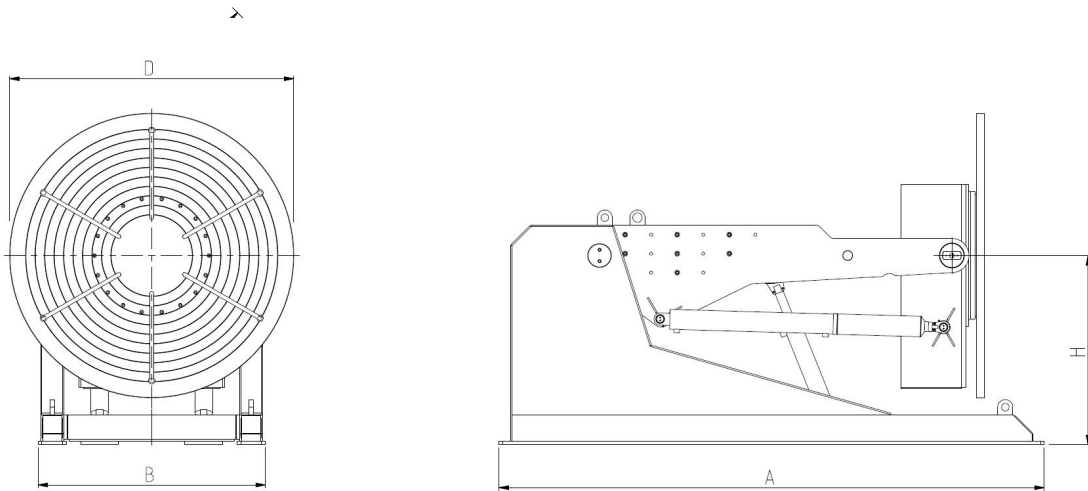

Model	Nominal Load	Rotating torque	Tilting torque	A	B	D	H min.	H max.	Speed
	kg	Nm	max. Nm	mm	mm	mm	mm	mm	rpm
HP 3000	3000	2000	7500	2000	1200	1100	800	1500	0 - 1
HP 5000	5000	5000	10000	2300	1600	1200	800	1500	0 - 1
HP 7500	7500	8000	14000	2600	2000	1250	1000	1700	0 - 1
HP 10000	10000	12000	30000	3000	2000	1300	1000	2000	0 - 0,75
HP 15000	15000	15000	65000	3000	2000	1500	1200	2100	0 - 0,75
HP 20000	20000	20000	100000	4000	2300	1700	1200	2100	0 - 0,75
HP 25000	25000	30000	175000	4200	2500	1800	1300	2300	0 - 0,5
HP 30000	30000	40000	250000	4200	2500	2000	1300	2300	0 - 0,5

- We reserve the right to alter specifications without prior notice -